
Connect the parts of over with each other. For the tents with uneven length of the side e.g.: 9m, 11m, 13m, 21m, 31m,.... remember that 1m extension was installed after the start element. The start part should be mounted at the front of the tent.



Put the roof cover gently on the construction. Then attach it to the roof frame using elastic rubbers with ball. The elastic rubbers should be installed alternately right - left and front and back.

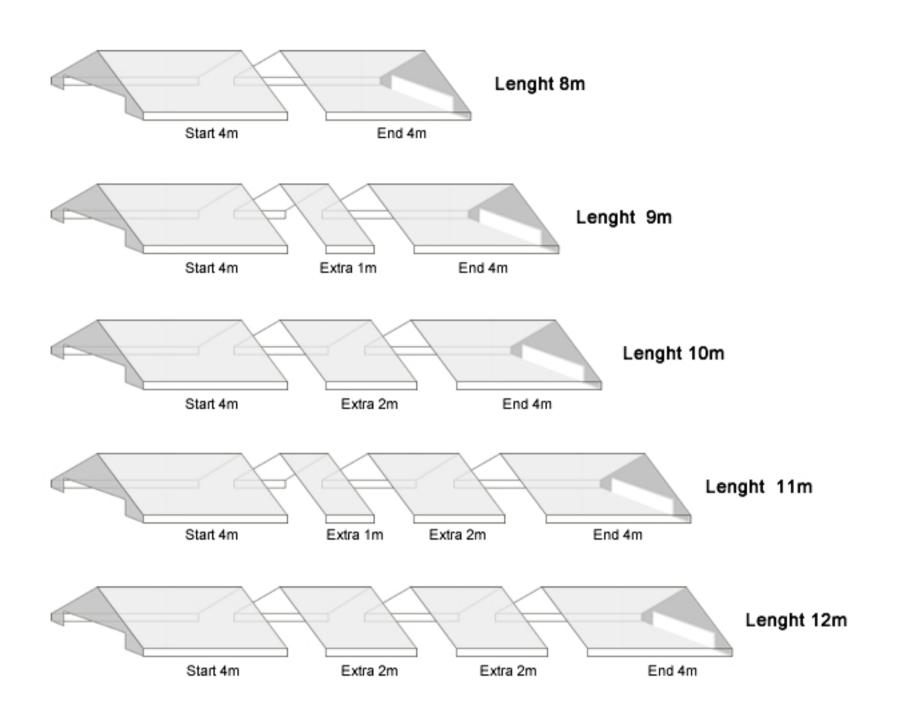